

A Vlasov-Maxwell Solver to Study Microbunching Instability in the FERMI@ELETTRA First Bunch Compressor System *

Gabriele Bassi

University of Liverpool and the Cockcroft Institute, UK

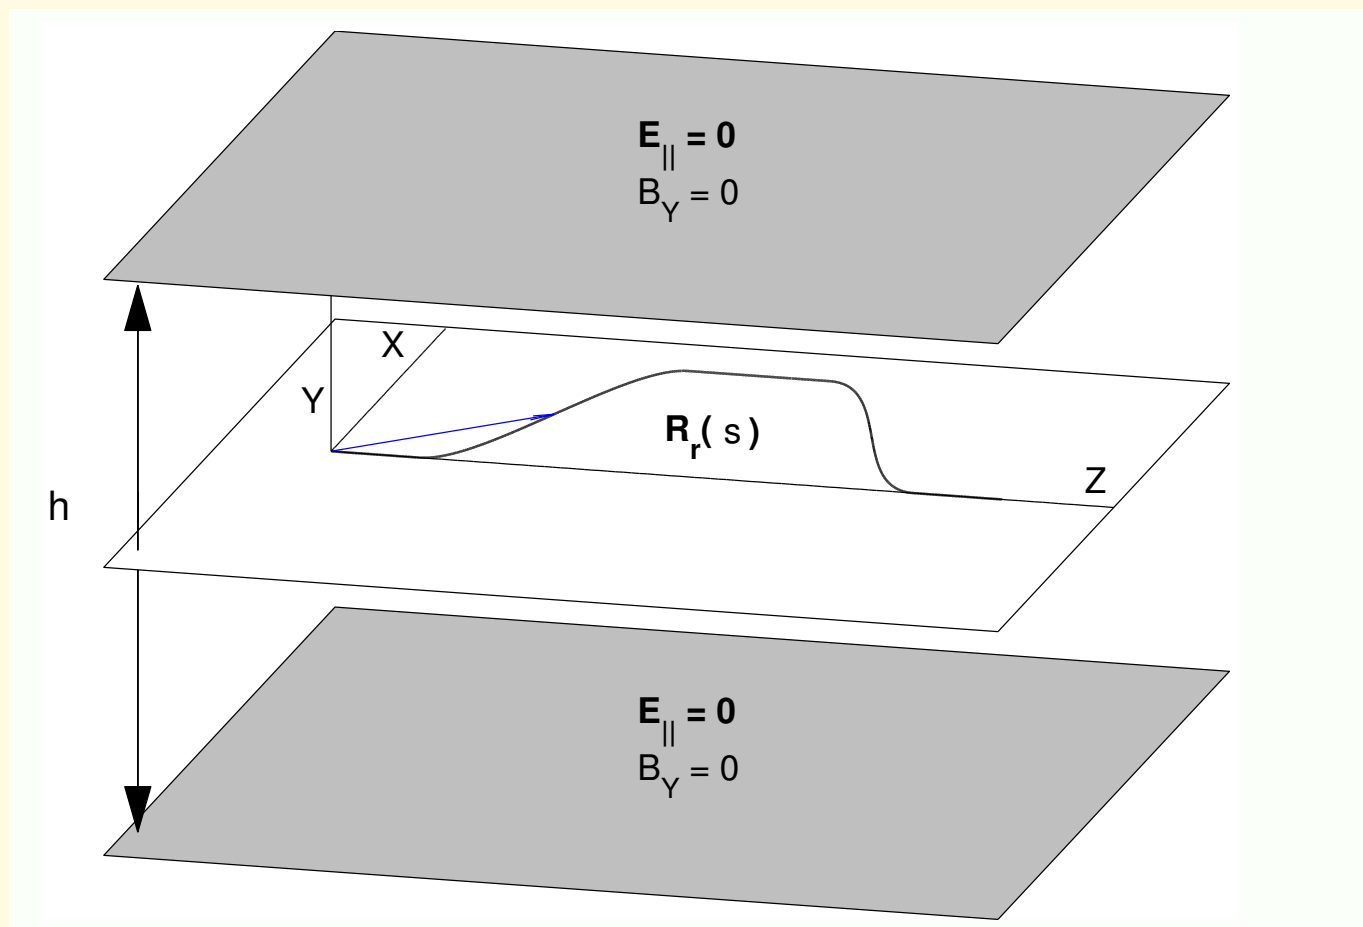
James A. Ellison, Klaus Heinemann

Mathematics and Statistics, UNM, Albuquerque, USA

1. Self Consistent Vlasov-Maxwell Treatment
2. Field Calculation
3. Self Consistent Monte Carlo Method
4. Microbunching Instability Studies

* Work partially supported by DOE grant DE-FG02-99ER41104; **Thanks to Bob Warnock.**

Self Consistent Vlasov-Maxwell Treatment I



Self Consistent Vlasov-Maxwell Treatment II

Wave equation in **lab** frame with “2D” planar source:

$$(\partial_Z^2 + \partial_X^2 + \partial_Y^2 - \partial_u^2)\mathcal{E} = H(Y)\mathcal{S}(\mathbf{R}, u), \quad \mathcal{E}(\mathbf{R}, Y = \pm g, u) = 0.$$

where $u = ct$, $\mathcal{E}(\mathbf{R}, Y, u) = (E_Z, E_X, B)$, $\mathbf{R} = (Z, X)$.

Vlasov equation in **beam** frame:

$$f_s - \kappa(s)x f_z + F_z f_{p_z} + p_x f_x + [\kappa(s)p_z + F_x] f_{p_x} = 0$$

where

$$F_z = \frac{e}{\bar{v}\bar{E}} \mathbf{V} \cdot \mathbf{E},$$

$$F_x = \frac{e}{\bar{E}\bar{\beta}^2} [-\bar{X}'(s)E_Z + \bar{Z}'(s)E_X + \bar{v}B],$$

and $\mathbf{V} = \bar{v}(\mathbf{t}(s) + p_x \mathbf{n}(s))$, $\mathbf{E} = (E_Z, E_X)$ and B are evaluated at $\mathbf{R} = \bar{\mathbf{R}}(s) + x\mathbf{n}(s)$ and $u = (s - z)/\bar{\beta}$.

Field Calculation (Lab Frame)

$$\mathcal{E}(\mathbf{R}, u) := \langle \mathcal{E}(\mathbf{R}, \cdot, u) \rangle = \int_{-g}^g H(Y) \mathcal{E}(\mathbf{R}, Y, u) dY.$$

averaged field computed much more quickly

$$\mathcal{E}(\mathbf{R}, u) = -\frac{1}{2\pi} \sum_{k=0}^{\infty} (-1)^k \left(1 - \frac{\delta_{k0}}{2}\right) \int_{-\infty}^{u-kh} dv \int_{-\pi}^{\pi} d\theta \mathcal{S}(\hat{\mathbf{R}}, v, k)$$

where $\hat{\mathbf{R}} = \mathbf{R} + \sqrt{(u-v)^2 - (kh)^2} (\cos \theta, \sin \theta)$.

Issues

- localization in θ (angular size of the beam) for $v \ll u - kh$ and in v
- delicate calculation (must be done **cum grano salis**)

θ integration: **superconvergent** trapezoidal rule

v integration: **adaptive** Gauss-Kronrod rule

Beam to Lab Charge/Current Density Transformation

- To solve Maxwell equations in lab frame must express lab frame charge/current density in terms of beam frame phase space density
- To a good approximation lab frame charge/current densities are

$$\rho_L(\mathbf{R}, Y, u) = H(Y)\rho(\mathbf{r}, \beta u) ,$$

$$\mathbf{J}_L(\mathbf{R}, Y, u) = \beta c H(Y) [\rho(\mathbf{r}, \beta u) \mathbf{t}(\beta u + z) + \tau(\mathbf{r}, \beta u) \mathbf{n}(\beta u + z)],$$

$$\rho(\mathbf{r}, s) = Q \int dp_z dp_x f(\zeta, s), \quad \tau(\mathbf{r}, s) = Q \int dp_z dp_x p_x f(\zeta, s),$$

where $\zeta = (z, p_z, x, p_x)$

Remark: subtlety in the change of independent variable $u=ct \rightarrow s$

Derivation to be published in a forthcoming paper

Self Consistent Monte Carlo Method

Outline and comparison with PIC for Vlasov-Poisson (VP) system from s to $s + \Delta s$

- From scattered beam frame points at $s \rightarrow$ **smooth/global** Lab frame charge/current density via a **2D** Fourier method (Charge deposition (+ filtering) in VP PIC).

1D Example:

1D orthogonal series estimator of $f(x)$, $x \in [0, 1]$

$$f_J(x) := \sum_{j=0}^J \theta_j \phi_j(x), \quad \theta_j = \int_0^1 \phi_j(x) f(x) dx, \quad \phi_0(x) = 1, \phi_j(x) = \sqrt{2} \cos(\pi j x), j = 1, 2, \dots$$

According to the fact that $f(x)$ is a probability density

$$\theta_j = E\{I_{\{X \in [0,1]\}} \phi_j(X)\}, \quad \text{therefore a natural estimate is } \hat{\theta}_j := \frac{1}{N} \sum_{n=1}^N I_{\{X_n \in [0,1]\}} \phi_j(X_n)$$

- Calculate fields at s from **history** of Lab Frame charge/current density using our field formula (Solve Poisson Equation in VP PIC)
- Use fields at s to move the phase space points to $s + \Delta s$ (Same in VP PIC)

Microbunching in FERMI@ELETTRA First Bunch Compressor

Microbunching can cause an instability which **degrades** beam quality

This is a major concern for free electron lasers where very bright electron beams are required

FERMI@ELETTRA first bunch compressor system proposed as a **benchmark** for testing codes at the September'07 workshop on microbunching instability in Trieste.

See <https://www.elettra.trieste.it/FERMI/index.php?n=Main.MicrobProgram>

FERMI@ELETTRA First Bunch Compressor Parameters

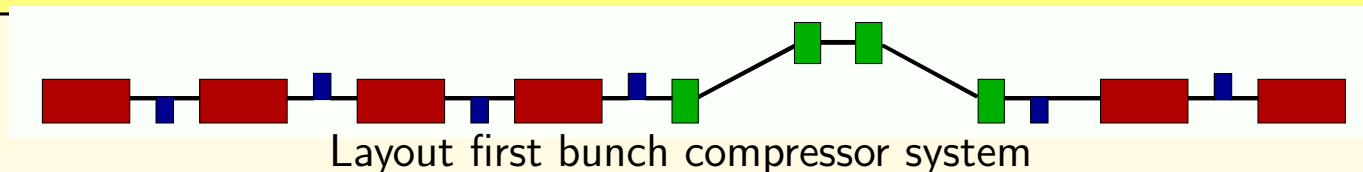
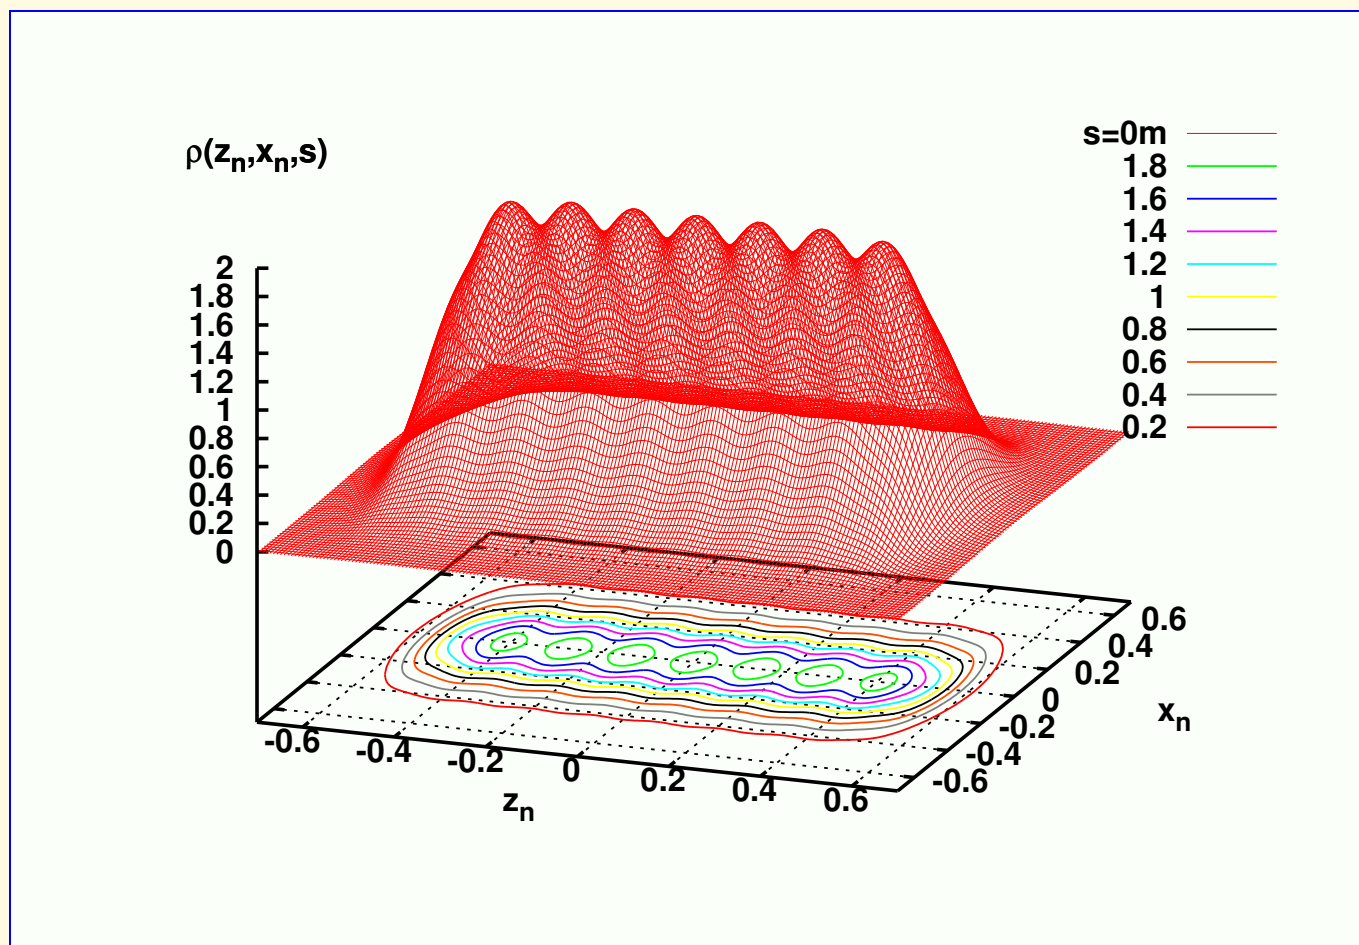


Table 1: Chicane parameters and beam parameters at first dipole

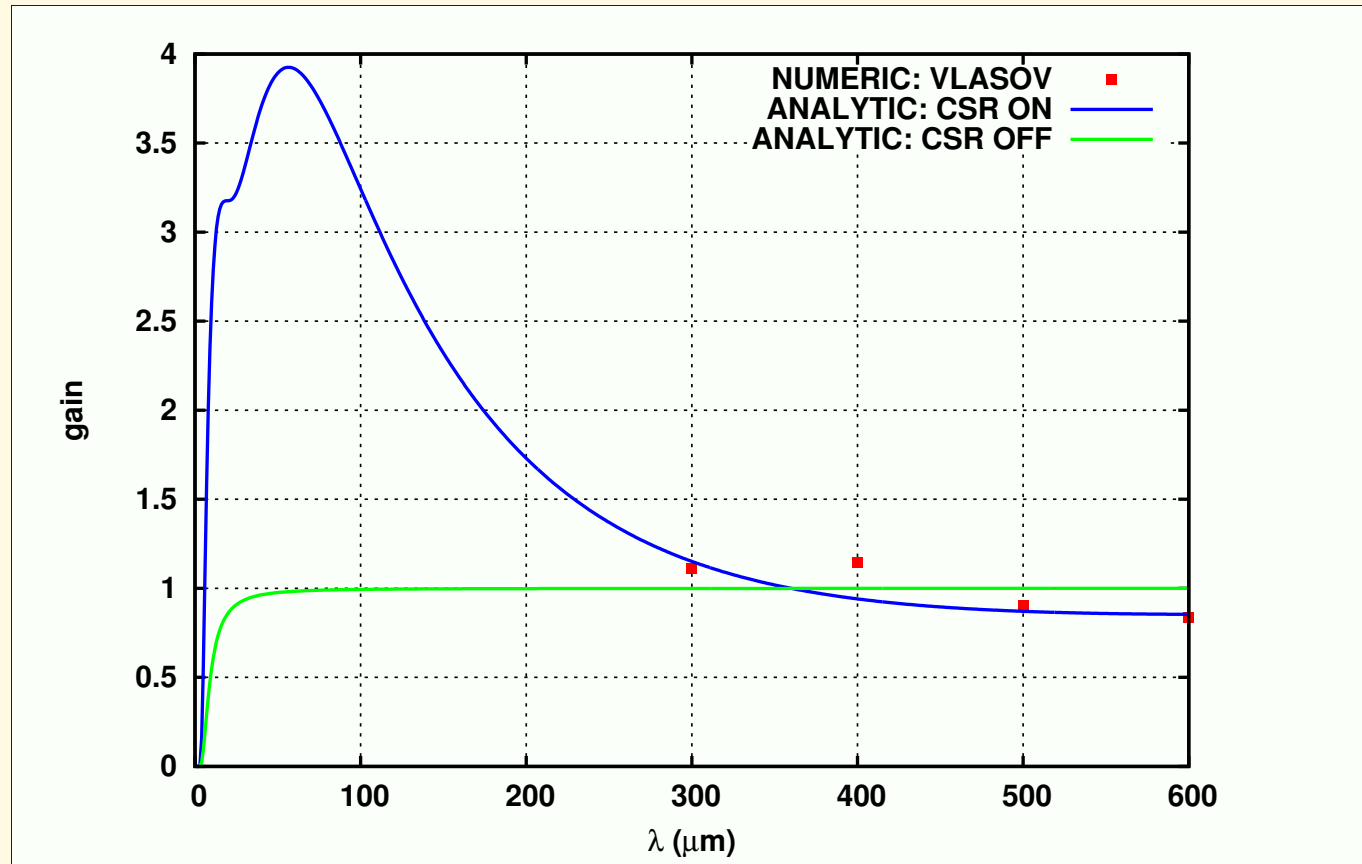
Parameter	Symbol	Value	Unit
Energy reference particle	E_r	233	MeV
Peak current	I	120	A
Bunch charge	Q	1	nC
Norm. transverse emittance	$\gamma\epsilon_0$	1	μm
Alpha function	α_0	0	
Beta function	β_0	10	m
Linear energy chirp	u	-27.5	1/m
Uncorrelated energy spread	σ_E	2	KeV
Momentum compaction	R_{56}	0.0025	m
Radius of curvature	ρ_0	5	m
Magnetic length	L_b	0.5	m
Distance 1st-2nd, 3rd-4th bend	L_1	2.5	m
Distance 2nd-3rd bend	L_2	1	m

FERMI@ELETTRA First Bunch Compressor I

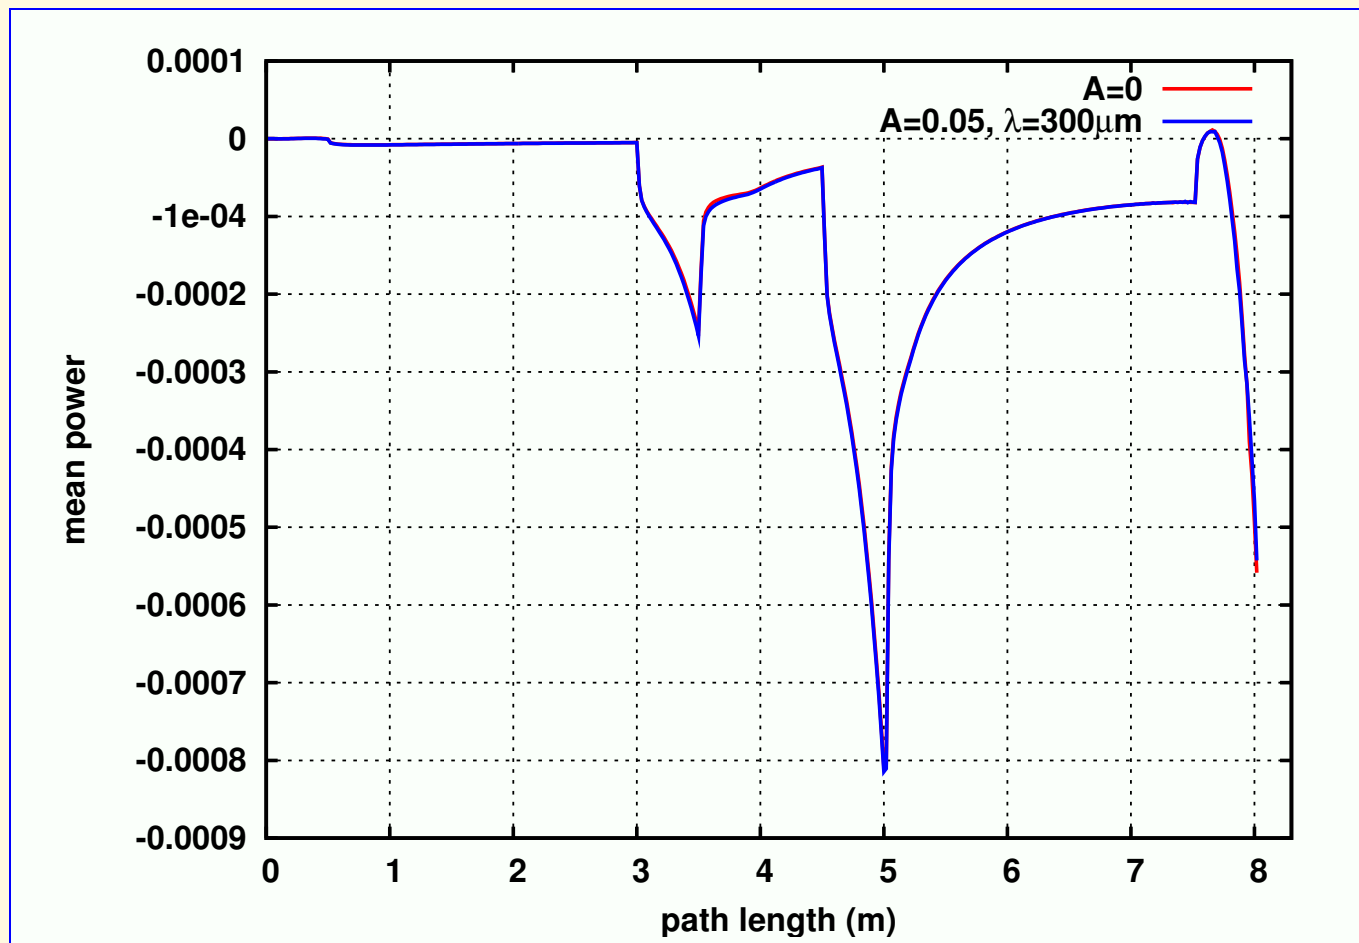


Initial charge density in norm. coordinates for $A=0.05$, $\lambda = 300\mu\text{m}$.
 Init. phase space density = $(1 + A \cos(2\pi z/\lambda))\mu(z)\rho_c(z, p_z)g(x, p_x)$.

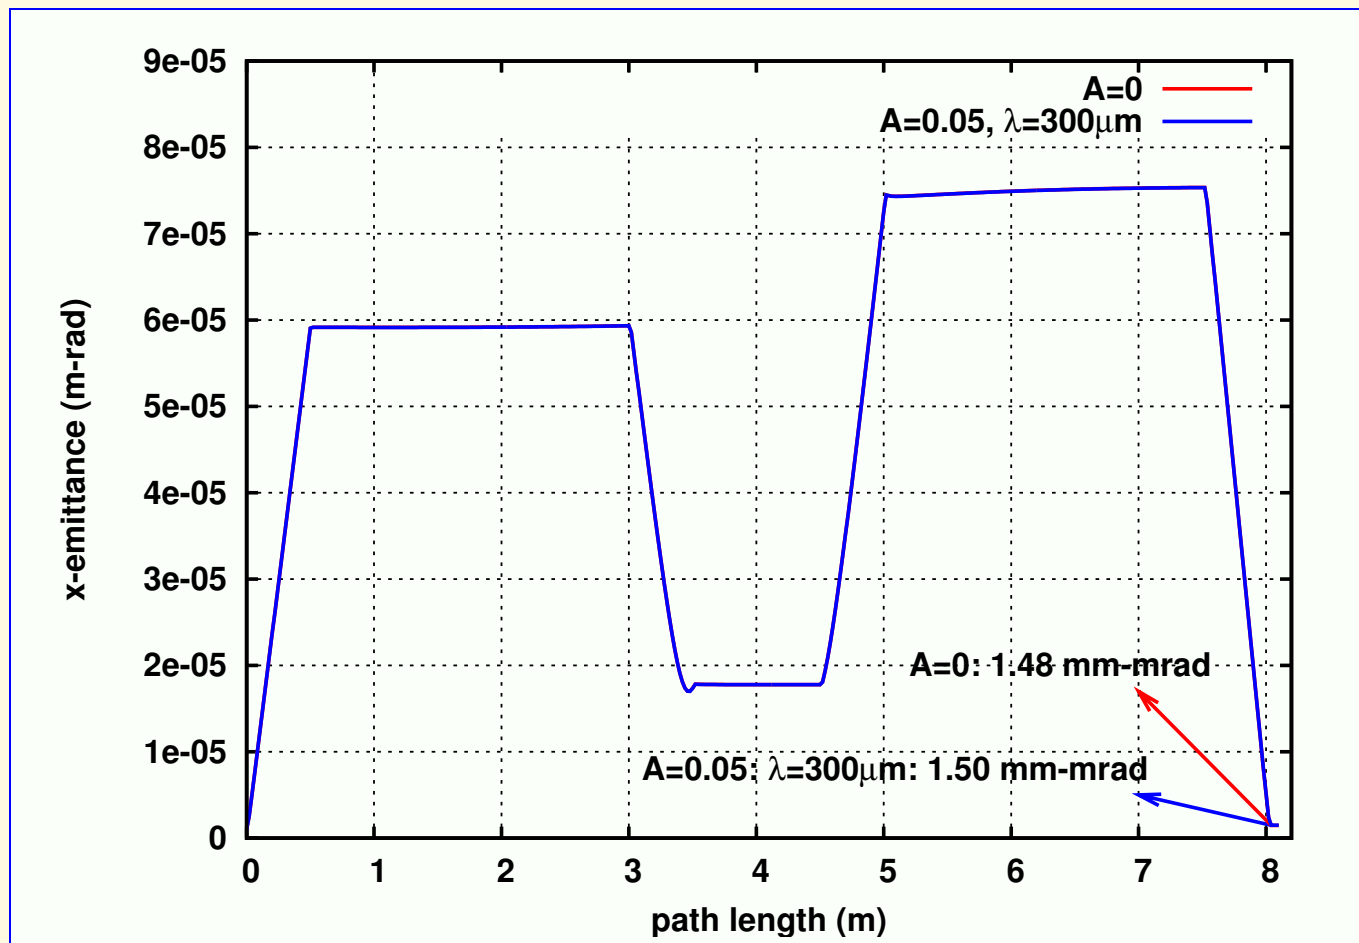
Gain factor



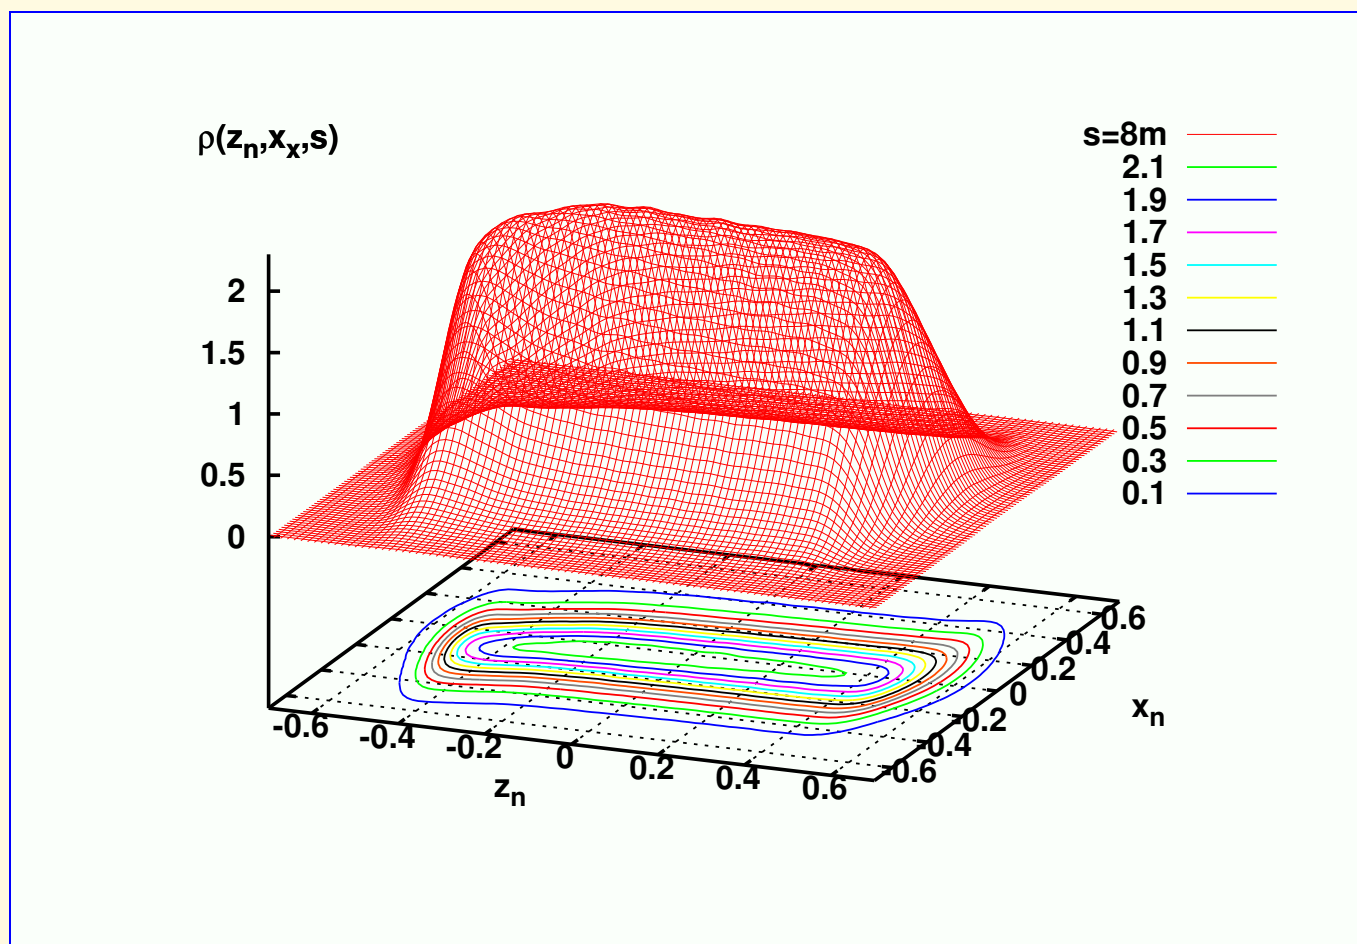
Gain factor $:= |b(k_f, s_f)/b(k_0, 0)|$, where $b(k, s) = \int dz \exp(-ikz) F(z, s)$ and $k_f = k_0/(1 + uR_{56}(s_f))$ for a given initial wavelength $\lambda = 2\pi/k_0$. Here the compressor factor $C = 1/(1 + uR_{56}(s_f)) = 3.54$, $s_f = 8\text{m}$.

FERMI@ELETTRA First Bunch Compressor II

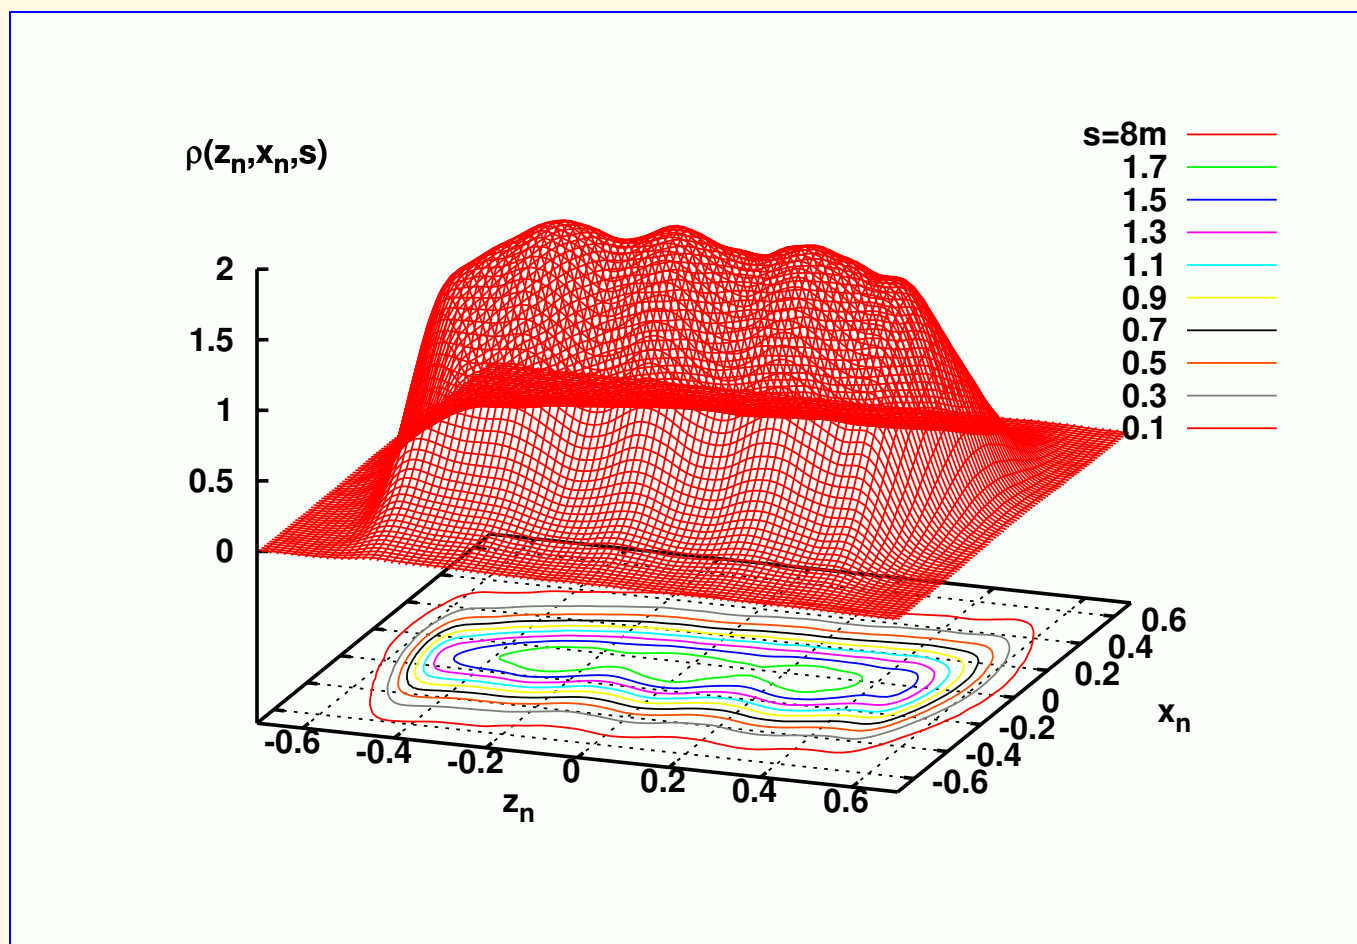
Mean power

FERMI@ELETTRA First Bunch Compressor III

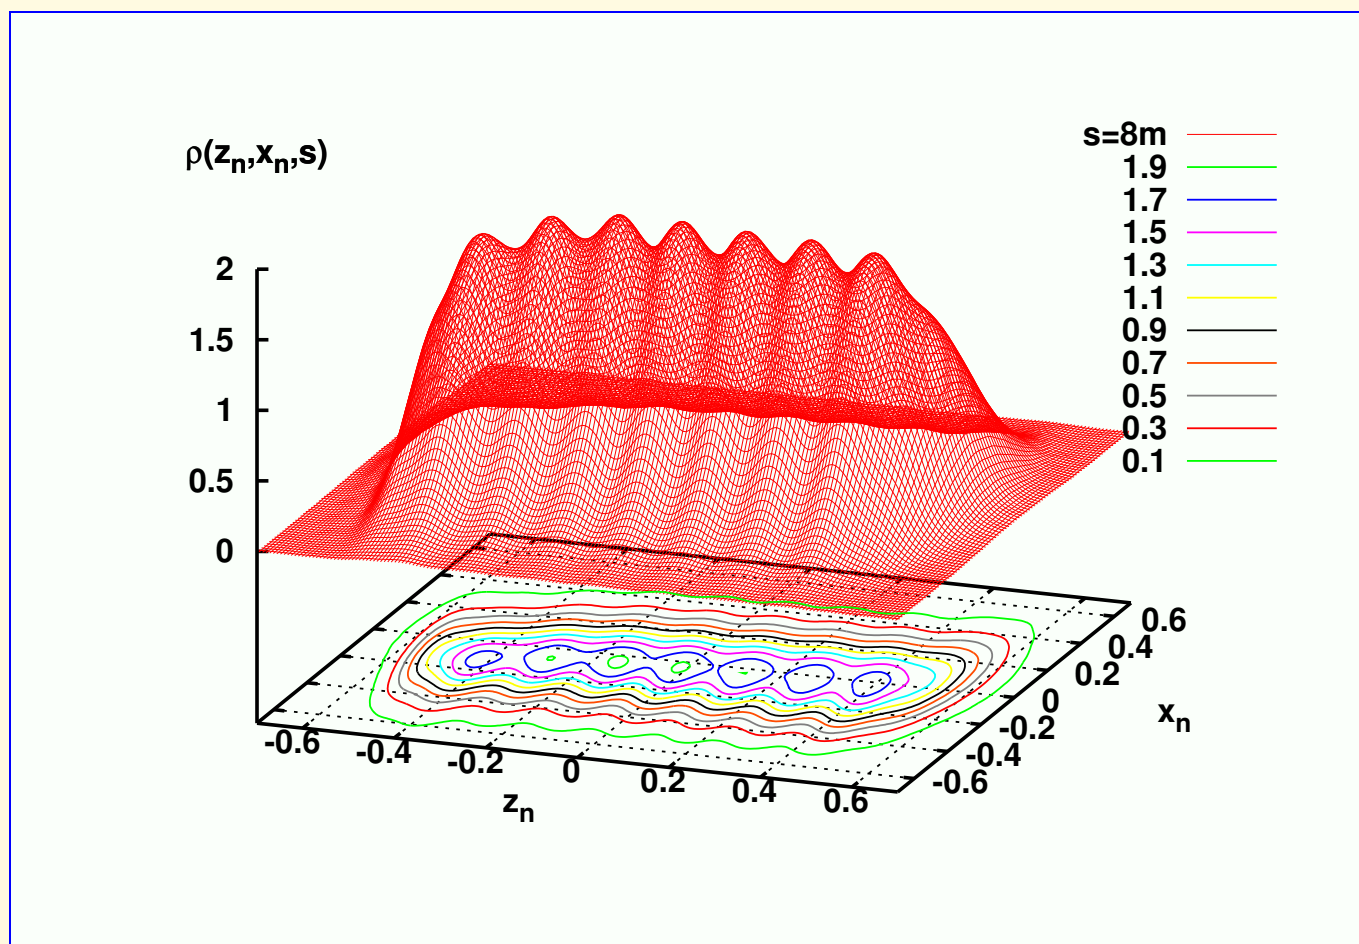
x-emittance

FERMI@ELETTRA First Bunch Compressor IV

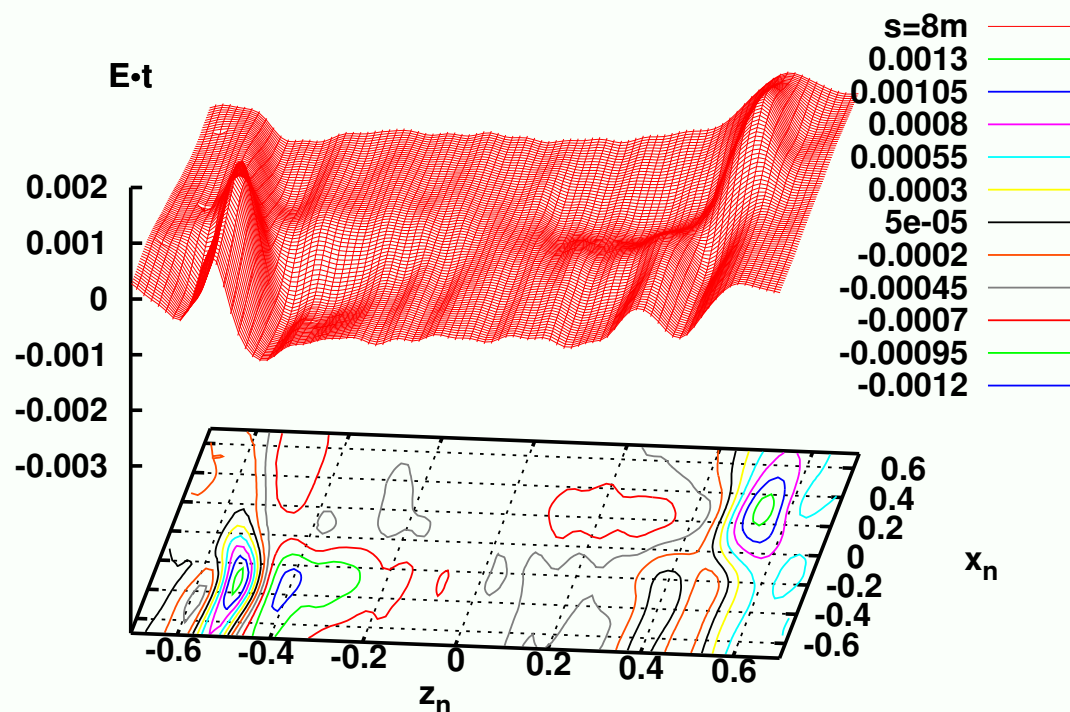
Charge density in norm. coord. at $s = 8m$ for no initial modulation ($A=0$).

FERMI@ELETTRA First Bunch Compressor V

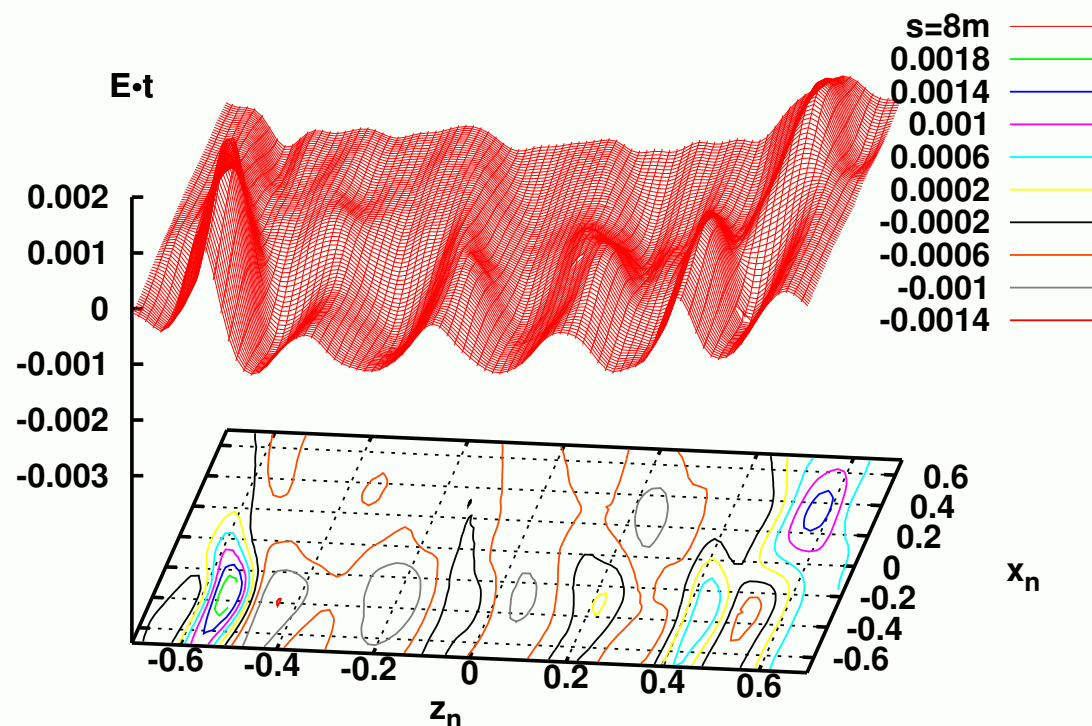
Charge density in normalized coordinates at $s = 8m$ for $\lambda = 600\mu\text{m}$

FERMI@ELETTRA First Bunch Compressor VI

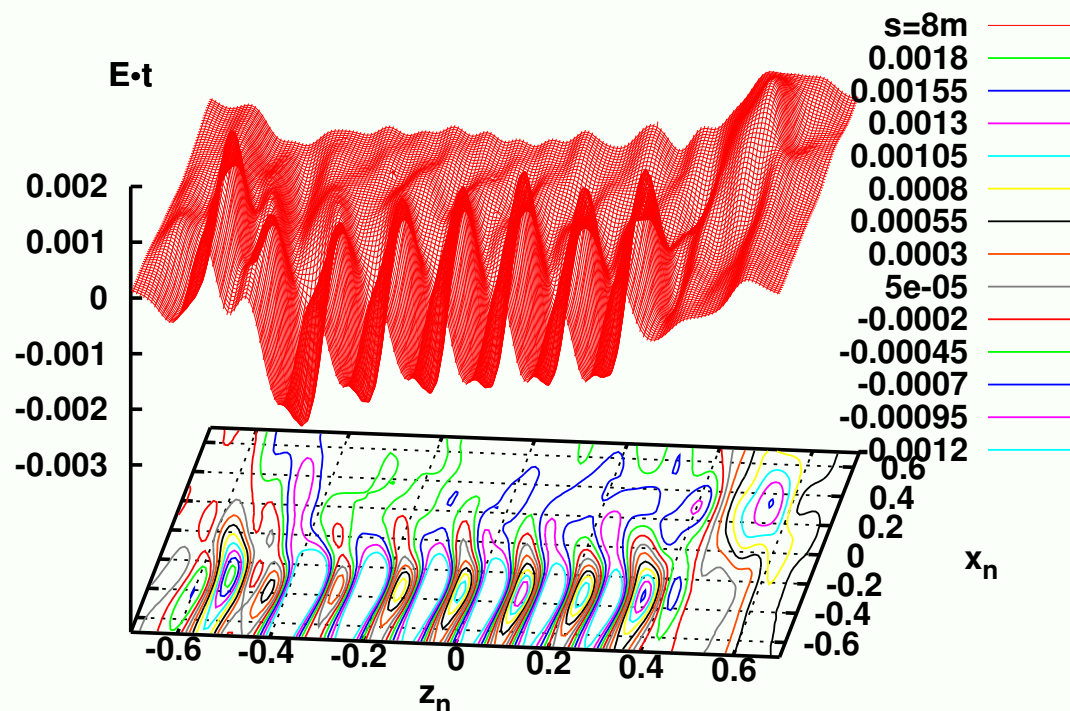
Charge density in normalized coordinates at $s = 8m$ for $\lambda = 300\mu m$

FERMI@ELETTRA First Bunch Compressor VII

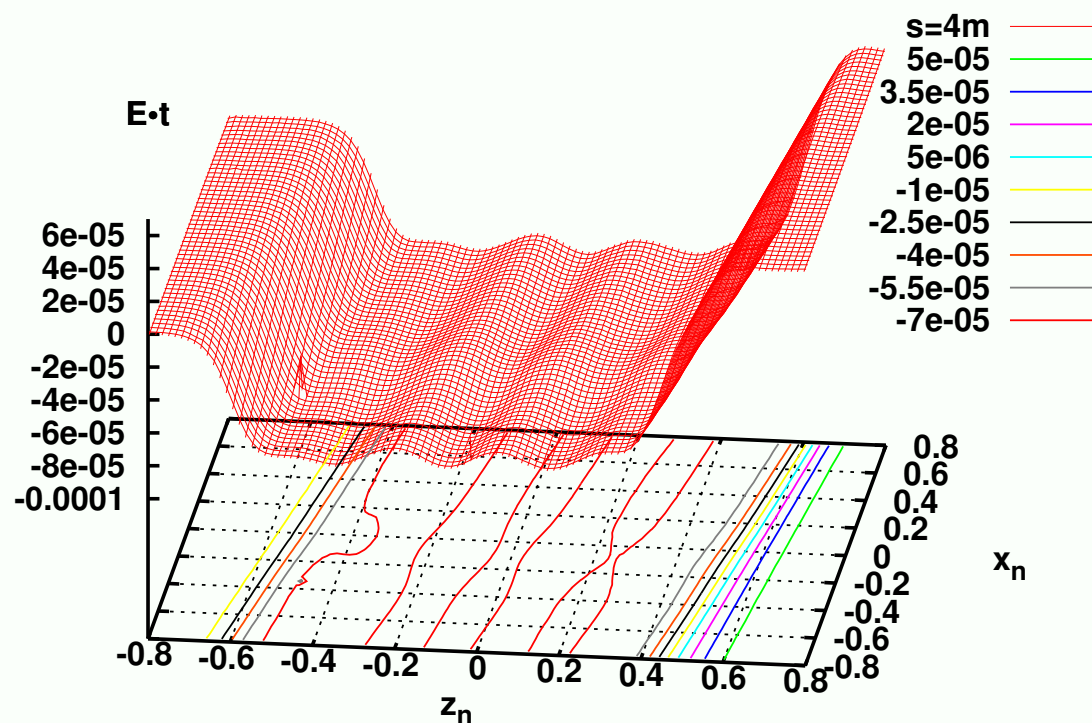
$E \cdot t$ in normalized coordinates at $s=8m$ for no initial modulation.

FERMI@ELETTRA First Bunch Compressor VIII

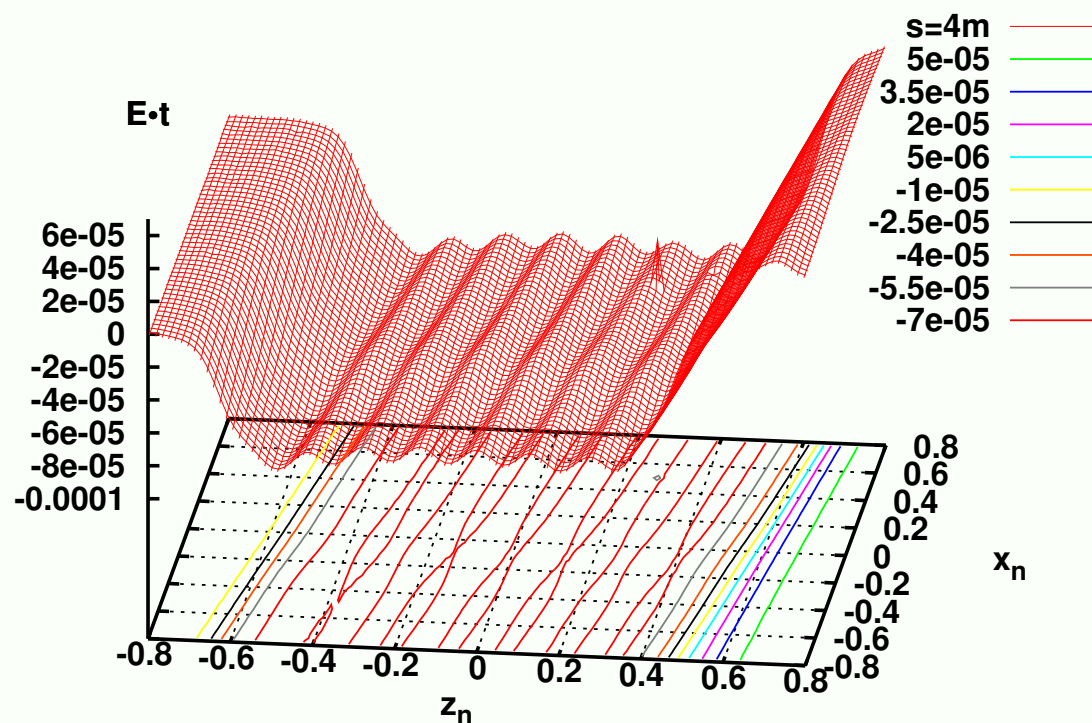
$E \cdot t$ in normalized coordinates at $s=8m$ for $\lambda = 600\mu m$.

FERMI@ELETTRA First Bunch Compressor IX

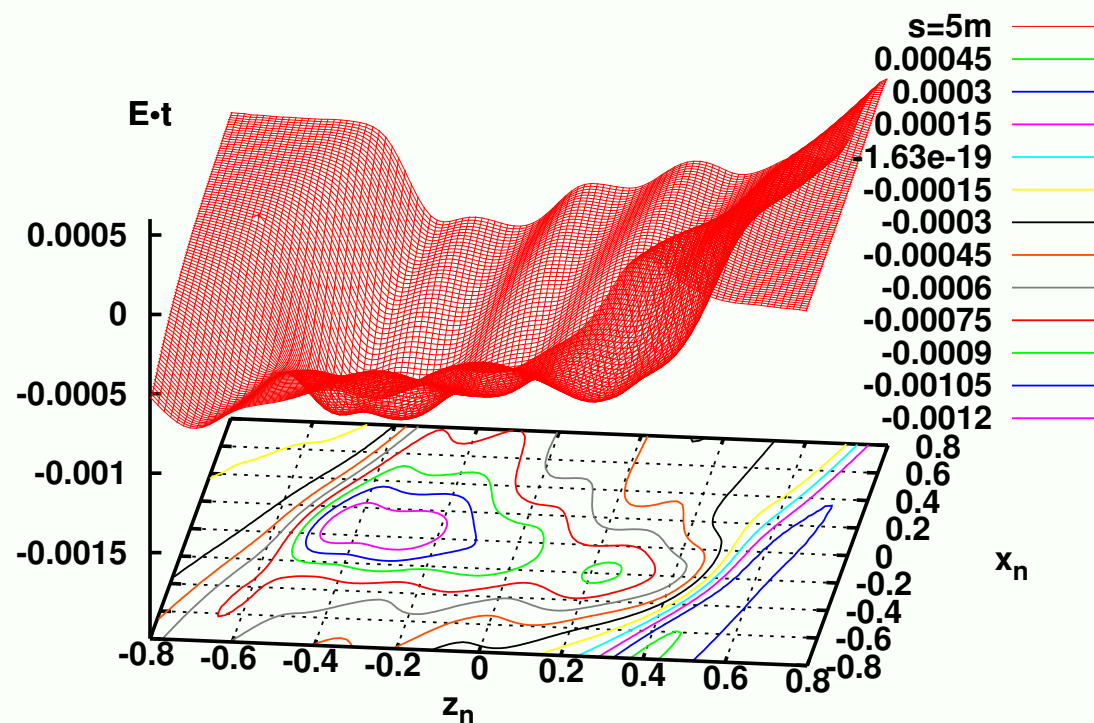
$E \cdot t$ in normalized coordinates at $s=8\text{m}$ for $\lambda = 300\mu\text{m}$.

FERMI@ELETTRA First Bunch Compressor X

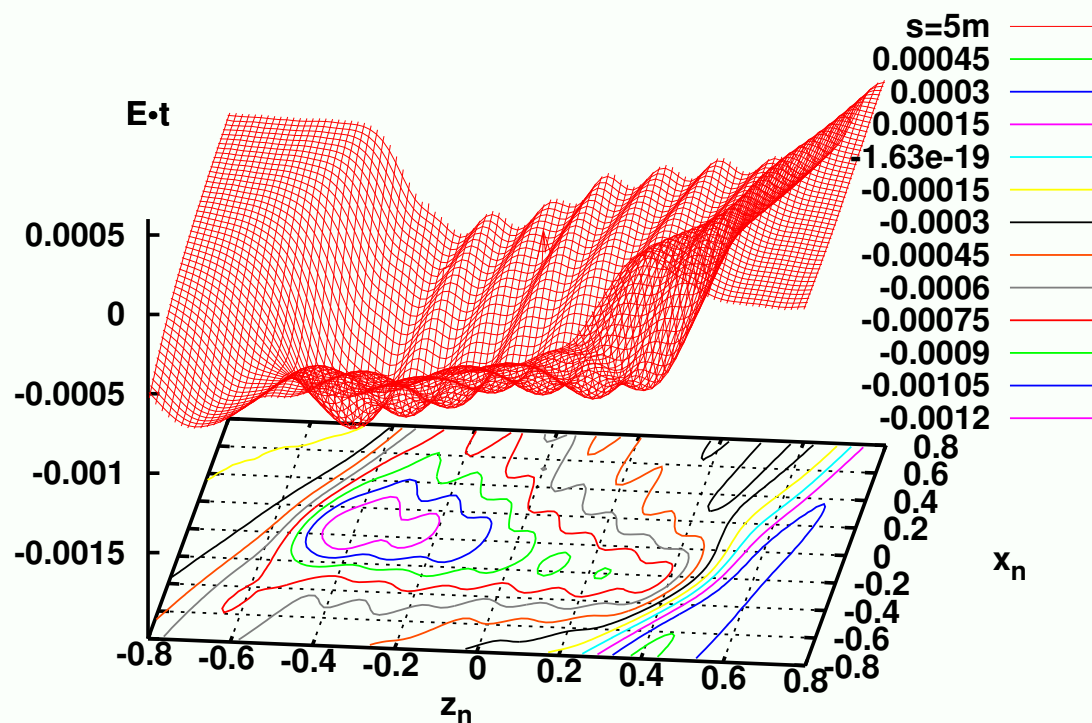
$E \cdot t$ in normalized coordinates at $s=4m$ for $\lambda = 600 \mu m$.

FERMI@ELETTRA First Bunch Compressor XI

$E \cdot t$ in normalized coordinates at $s=4\text{m}$ for $\lambda = 300\mu\text{m}$.

FERMI@ELETTRA First Bunch Compressor XII

$E \cdot t$ in normalized coordinates at $s=5m$ for $\lambda = 600\mu m$.

FERMI@ELETTRA First Bunch Compressor XIII

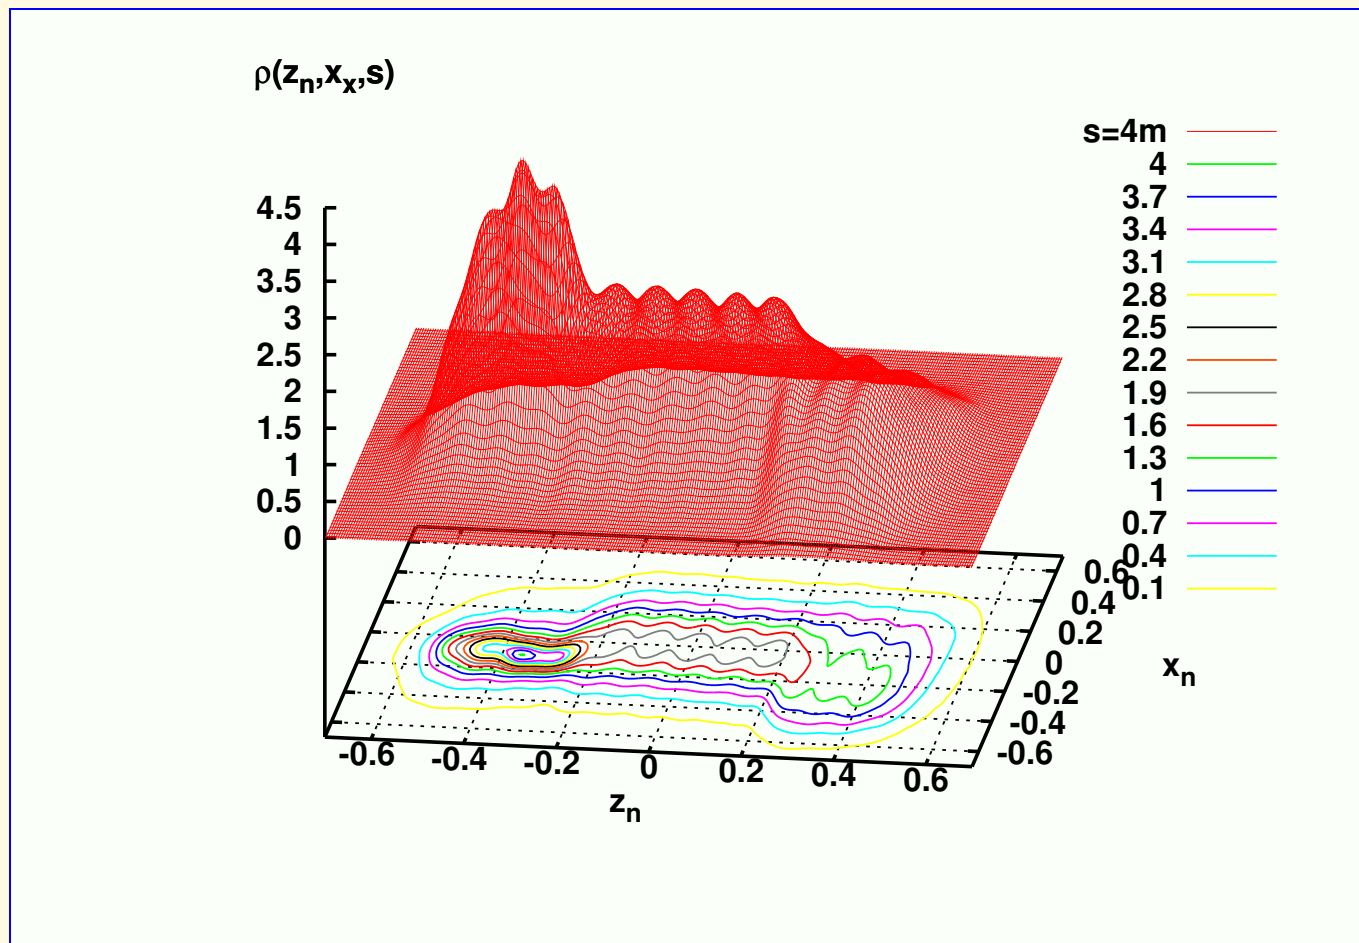
$E \cdot t$ in normalized coordinates at $s=5m$ for $\lambda = 300\mu m$.

Main Issues and Accomplishments

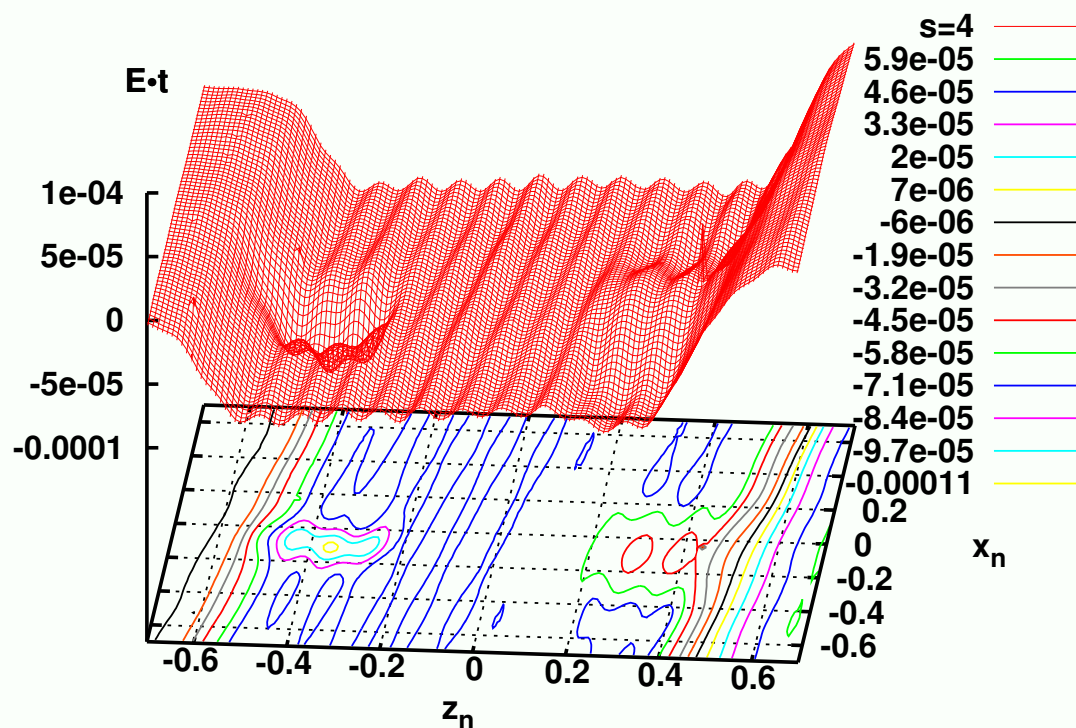
- FERMI@ELETTRA microbunching studies:
Creation of modulations in $E \cdot t$ for the $\lambda = 300\mu\text{m}$ case but no detrimental effect on the charge density
Simulations done at the HPC at UNM and on NERSC at LBNL,
typical runs on NERSC: N procs = 200-700, N particles = 2×10^7 ,
few hours of CPU time
- Storage/computational cost very important
 - As much analytical work as possible
 - State of the art numerical techniques: integration, interpolation, density estimation, quasirandom generator (see Warnock et.al. TUPP109 Tuesday)
 - Parallel computing, parallel I/O
- Delicacy of field calculation, support of charge/phase space density

Future Work

- Study wavelengths shorter than $\lambda = 300\mu\text{m}$ and different amplitudes of the initial modulation
- Complete studies for benchmark **microbunching instability** including RF cavities
- Results will be presented at the next Microbunching Instability Workshop at LBNL

FERMI@ELETTRA First Bunch Compressor XIV

Charge density in normalized coordinates at $s=4m$ for $\lambda = 200\mu m$.

FERMI@ELETTRA First Bunch Compressor XV

$E \cdot t$ in normalized coordinates at $s=4$ m for $\lambda = 200 \mu\text{m}$.